



## Features

### **LCD Touchscreen Display**

Easy to operate and reduces errors

### **Digital Programming**

For variable toast time and temperature settings

### **Menu Shortcuts**

Quickly switch from one menu item to another

### **Slim Design**

It is 60% smaller than the legacy 297 toaster and 17% smaller than the leading competitors mini version

### **Auxiliary Heat Option**

Higher quality bun toasting for great tasting sandwiches

### **Patented Parallel Compression**

Increased toasting span, no crushed buns, improved quality and even toasting end to end

### **Multiple Belt Options**


Match belt to bread type for highest toasting quality

### **Programmable Dayparts**

Personalize to bread type and align to your daypart menu changes

### **Warranty**

1-Year parts and labor to minimize downtime

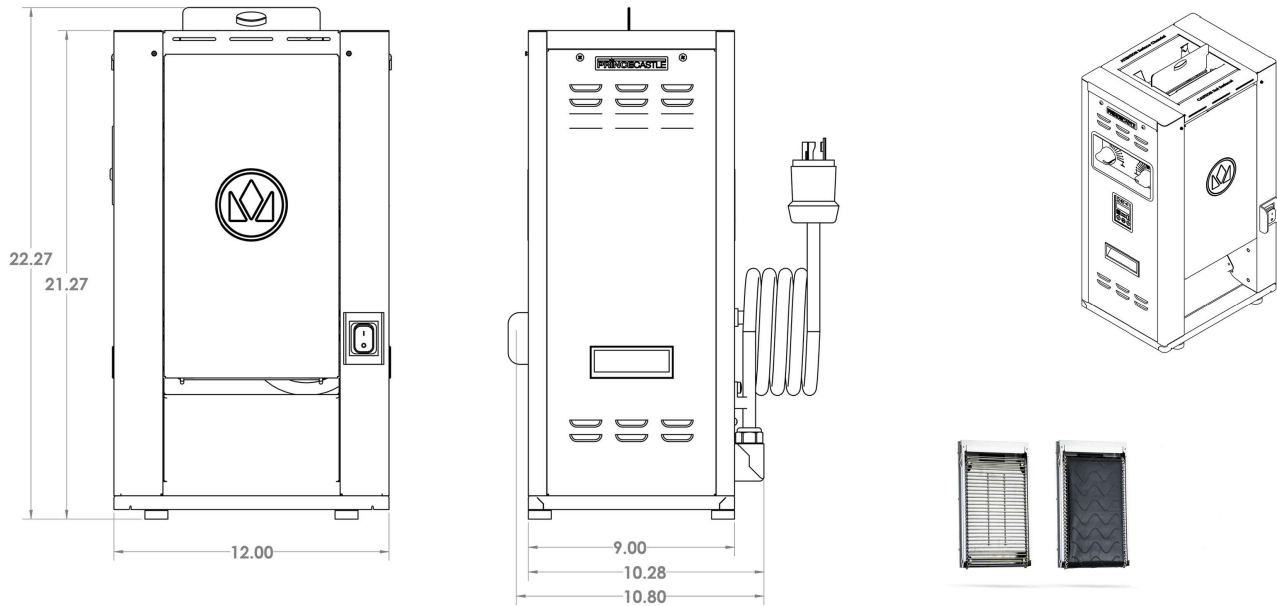

## Technical Specifications

<b>Product Category</b>	Vertical Contact Toaster	<b>Unit Weight</b>	51lbs
<b>Product Dimensions</b>	12"W x 21.3"H x 10.8"D	<b>Shipping Weight</b>	56lbs
<b>Power Requirements</b>	208-240 VAC, 50/60 Hz, 8.2-9.4A, Single Phase	<b>Installation Type</b>	Countertop
<b>Toasting Type</b>	Contact	<b>Warranty</b>	1-Year: Parts & Labor
<b>Operating Temperatures</b>	400° - 550°F	<b>Exterior Construction</b>	Stainless steel construction with anti-slip rubber base
<b>Bread Diameter</b>	5.5"	<b>Belt Options</b>	Wire, Silicone
<b>Compression Settings</b>	Crown: 0.4 - 1.25"    Heel: 0.3 - 1"	<b>Accessories</b>	Butter Wheel Replacement Release Sheet Kit
<b>Capacity</b>	Maximum Bun Output: 3,000 buns/hr	<b>Agency Listing</b>	ETL/Intertek Conforms to ANSI/NF 7 Conforms to ANSI/UL STD 471 Certified to CAN/CSA STD C22.2 No.120
<b>Toasting Time</b>	6-40 Seconds		
<b>Model Number</b>	<b>Description</b>		
CTD-W	Wire Belt CTDE, 208-240 VAC, 50/60 Hz, 8.2-9.4A, Single Phase, NEMA L6-20P		
CTD-WCE	Wire Belt CTDE, 208-240 VAC, 50/60 Hz, 8.2-9.4A, Single Phase, CEE 7-7		
CTD-WS	Silicone Belt CTDE, 208-240 VAC, 50/60 Hz, 8.2-9.4A, Single Phase, NEMA L6-20P - (Auxiliary Heater Only)		
CTD-WSCE	Silicone Belt CTDE, 208-240 VAC, 50/60 Hz, 8.2-9.4A, Single Phase, CEE 7-7 - (Auxiliary Heater Only)		
XXXX-XX-AX	*Auxiliary Heater, 208-240VAC, 50/60Hz, 0.69-0.80a t		
511-142	CTD Butter Wheel		
511-141	CTD Teflon Release Sheet Kit		

\*to add an Auxiliary Heater, insert (AX) on end of model number [i.e. CTD-W-AX]

To learn more about **CTD Toasters** visit [princecastle.com](http://princecastle.com)  
To contact us directly, go to [princecastle.com/contact/](http://princecastle.com/contact/)